



# PTFE HOSE


## Extreme Temperature

Temperature Range  
-65°F to +500°F

Excellent resistance  
to Harsh Chemicals

Up to 2750 psi  
Working Pressure

Meets requirements  
of SAE100R14

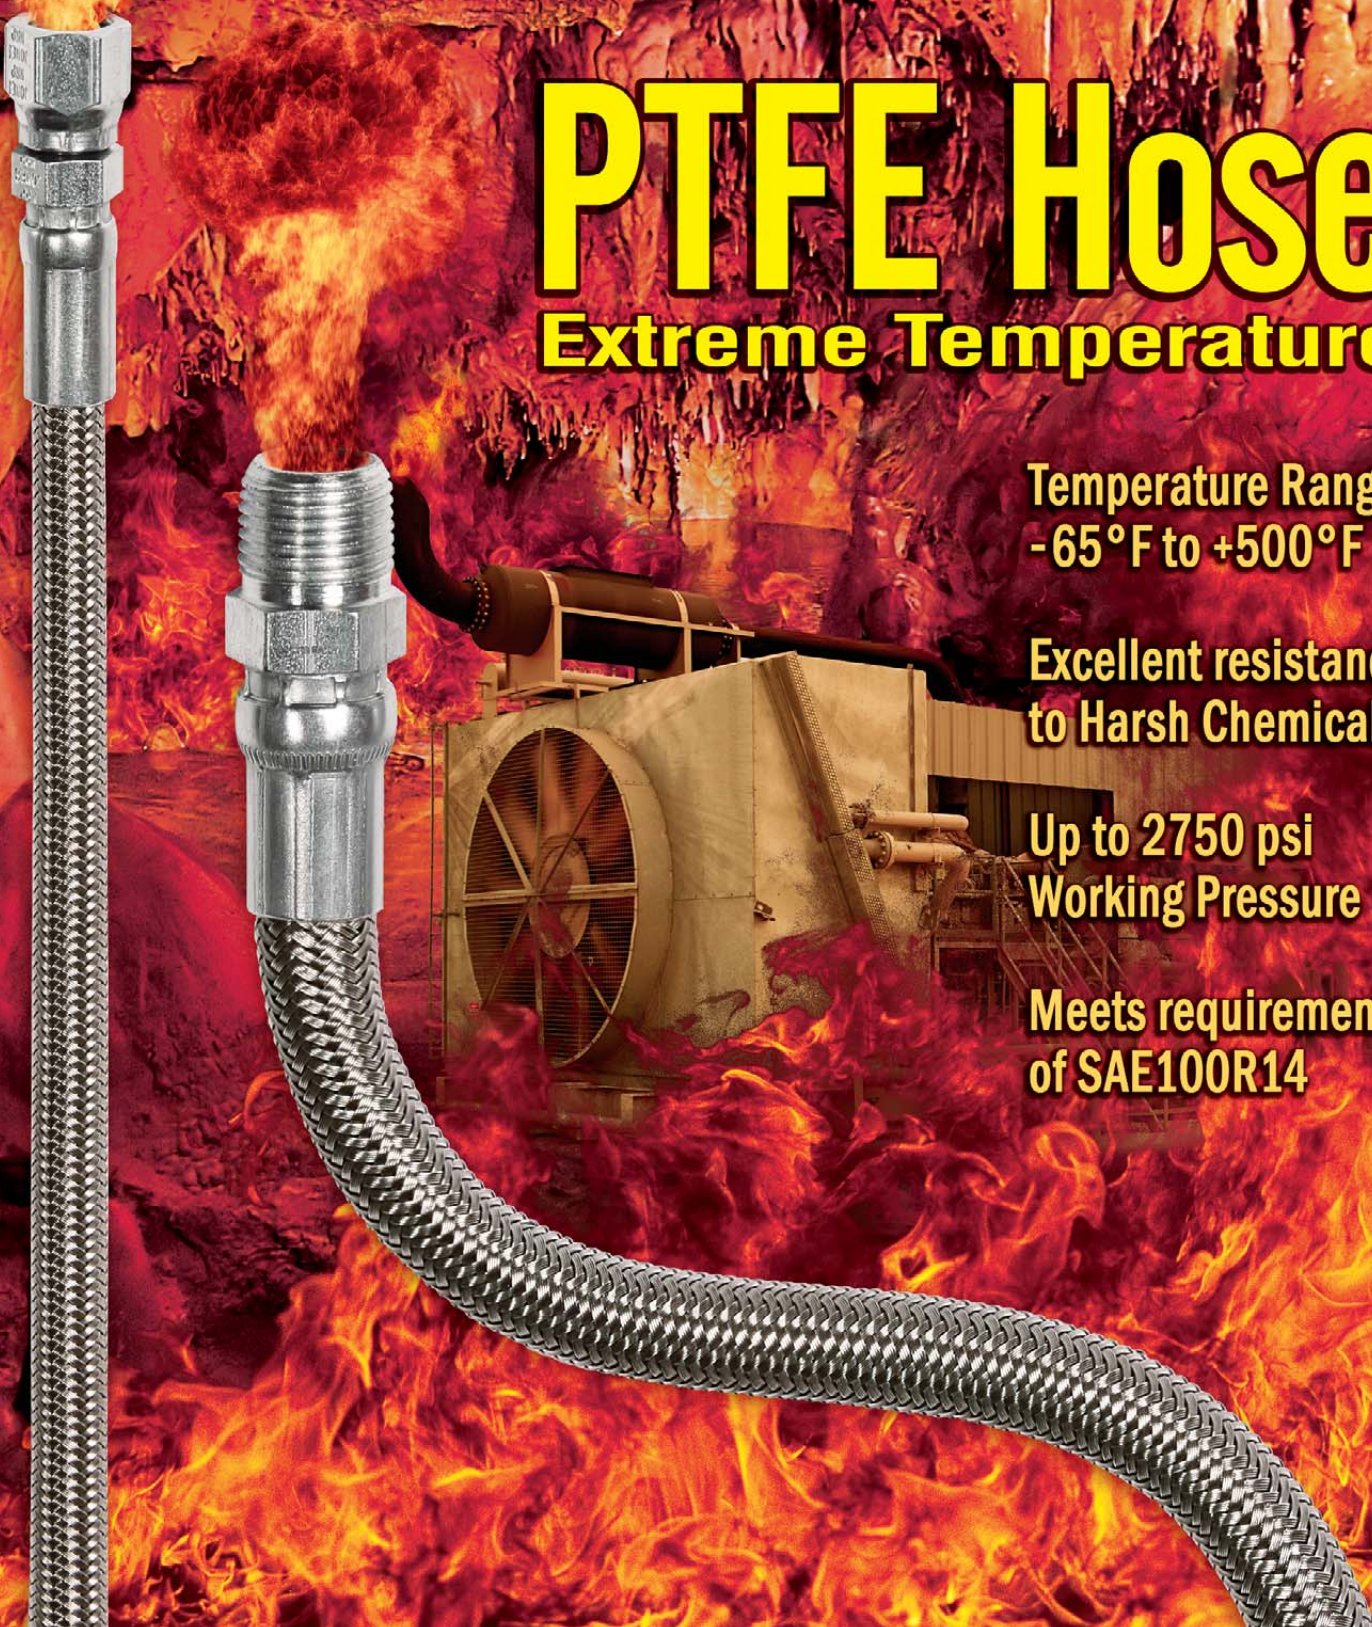



# SAE 100R14 P.T.F.E. Type A

Part Number	Hose ID (inches)	Hose OD (inches)	Rated WP (psi)	Minimum Burst (psi)	Minimum Bend Radius (inches)
6014-04	3/16	.300	2,750	11,000	2.0
6014-05	1/4	.350	2,610	10,440	3.0
6014-06	5/16	.430	2,540	10,160	4.0
6014-07	3/8	.480	2,390	9,560	5.0
6014-08	13/32	.540	2,030	8,120	5.4
6014-10	1/2	.640	1,740	6,960	6.6
6014-12	5/8	.740	1,270	5,080	8.0
6014-14	3/4	.910	1,010	4,040	9.2
6014-16	7/8	1.030	870	3,480	9.2
6014-18	1	1.150	870	3,480	12.0
6014-20	1-1/8	1.300	630	2,520	16.4

**Application:** High and low temperature applications with excellent chemical resistant properties. Meets or exceeds requirements of SAE 100R14 Type A.

**Tube:** PolyTetraFluoroEthylene (P.T.F.E.)

**Reinforcement:** Single braid of 303/304 series stainless steel wire

**Temperature:** Continuous -65°F to +500°F (-54°C to +260°C)

**Note:** For specific technical data, refer to SAE 100R14 specifications