

INDUSTRIAL



1324 HYDROCARBON DRAIN HOSE

NRP PART NUMBER	HOSE I.D. (NOMINAL)	HOSE O.D. (NOMINAL)	RATED W.P.	BURST PRESSURE (MIN)	WT. PER FT.
	(IN.)	(IN.)	(PSI)	(PSI)	(LBS)
1324-12	0.75	1.22	350	1,400	0.57
1324-16	1.00	1.49	350	1,400	0.70

Tube: Black | Oil resistant Nitrile (NBR)

Reinforcement: Single ply of High-tensile Wire Braid

Cover: Blue | Oil, weather & abrasion resistant Hypalon

Temperature: -20° F to 300° F (-28.8° C to 148.8° C). Approved for intermittent exposure to 350° F (176.6° C)

Application(s): Designed for applications requiring resistance to oil & petroleum based fluids | For use in refining industry during transfer of hydrocarbons | Excellent for cleaning of storage tanks & vessels | Kink & crush resistant | NOT FOR STEAM SERVICE

Offered Length(s): 50 Feet

Safety Factor: 4:1

Branding: NRP JONES 1324 HYDROCARBON DRAIN 350 PSI W.P. MADE IN USA


ISO 9001:2015 CERTIFIED QUALITY SYSTEM API COMPLIANT QUALITY MANAGEMENT SYSTEM

PO BOX 310, LAPORTE, IN 46352-0310

P: 800-348-8868 // SALES@NRPJONES.COM

WWW.NRPJONES.COM

MADE IN THE USA

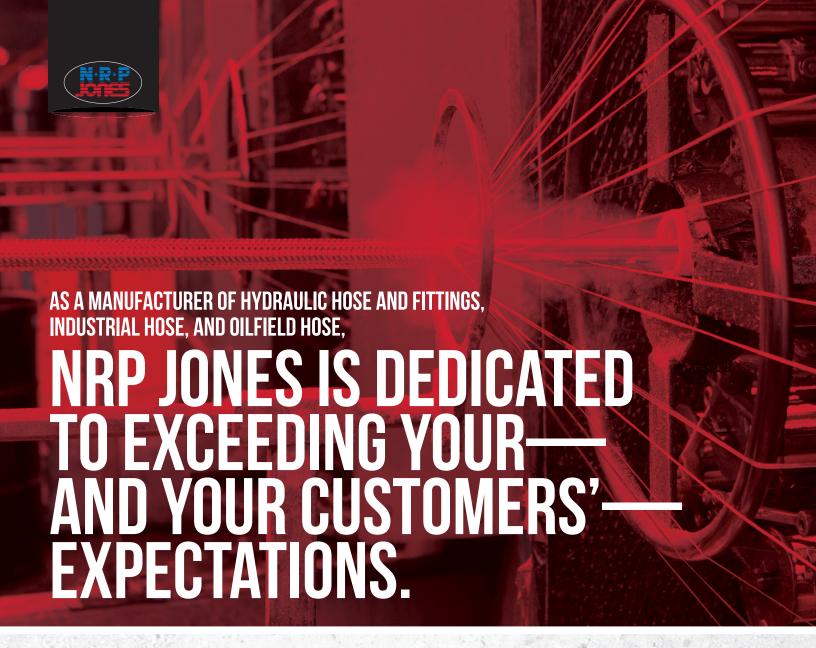

NRP Jones has what it takes to build your business. Over a half-century of experience helps you build customer satisfaction while increasing your sales and profits.

QUALITY

Pride and craftsmanship result in the quality products that you require.

Product reliability will live up to your expectations.

NRP Jones ISO 9001:2015 Registered.

SERVICE

Select from a wide range of hose and fitting products.

Orders are shipped from a large inventory.

You can count on prompt, knowledgeable, friendly help every time you call.

Your business is taken personally.

VALUE

NRP Jones offers competitive pricing.

Distributor programs are available to increase your sales and margins.

We'll Go to Great Lengths to Meet Your Needs